

Ceiling Panels

Tranquility that embraces.






deblick

The peace to hear yourself think

Subtly placed at the ceiling, our Coated Ceiling Panels marry an open area design with a pleasantly peaceful soundscape. Filled with all natural sheep wool that absorbs distracting work and discussion sounds our Coated Ceiling Panels bring the place at ease. Let yourself be embraced by tranquility and enjoy the peace to hear yourself think.



In standard sizes or made to measure

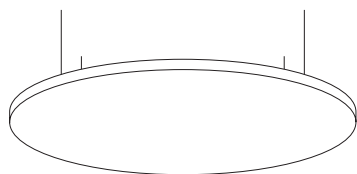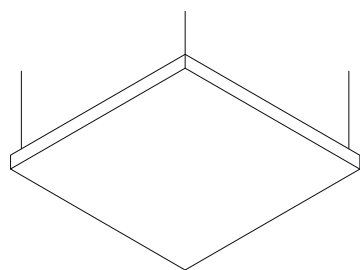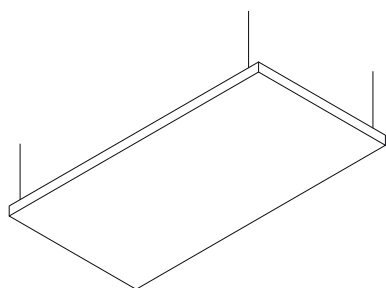

Ceiling Panel Rectangle

Width	Length
1800	1200
2400	600
2400	1200
3000	1200

Ceiling Panel Square

Width	Length
1200	1200

Ceiling Panel Round

Diameter
Ø 800
Ø 1200

The divine details



Frame

50mm thick, recycled aluminium profile in accordance with EN-486. Standard colours RAL9010, 9016, 9005 – please contact us for special requests.

Filling


15mm sheep's wool 1500 gr/m², applied double-sided. Other fillings upon request.

Upholstery

A list of fabric colours is included in the Material List – please contact us for special requests. Createx printed upholstery (picture, corporate identity): DIN EN 13501-1.

Sound absorption

Sound absorption coefficient α_w 1,00 (NEN-EN-ISO 354).

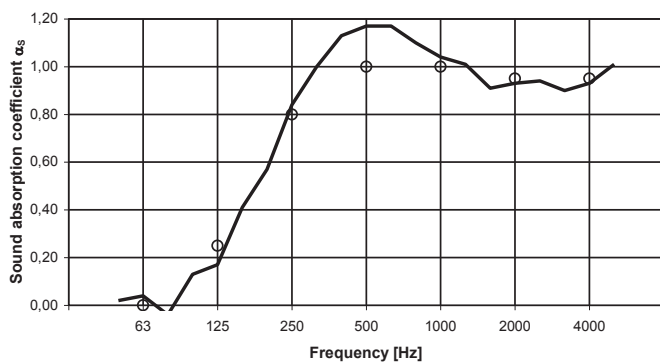

Fire retardancy

Wool is naturally fire retardant. For the combustion of wool, 25,2% oxygen is needed. The air we breathe contains only 21% oxygen on average, which makes the material flame extinguishing. The flash point of wool can only be achieved at a temperature of circa 580°C.



Deblick is a certified company.



ecovadis

From spaces to places